
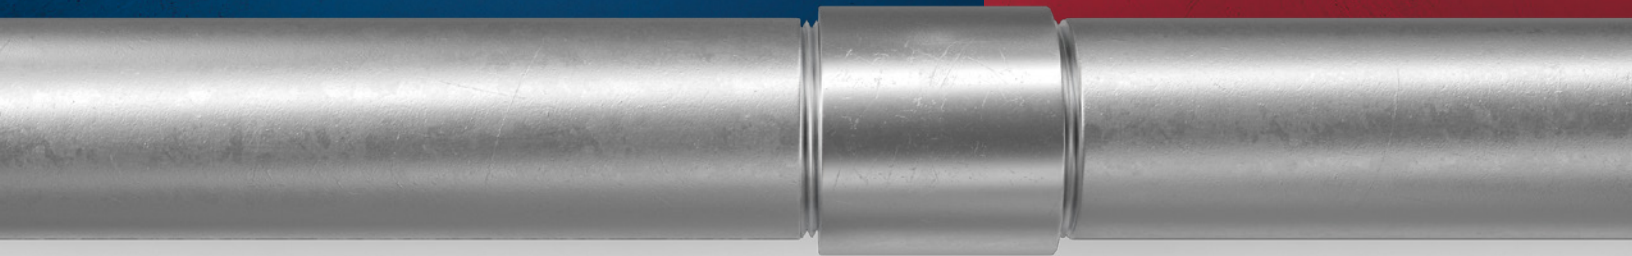


ALUMINUM EC&N MADE IN THE USA

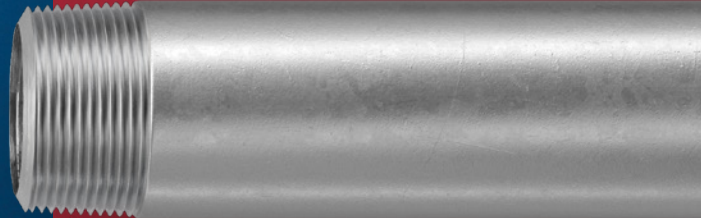

Look to Picoma for a full line of American-made aluminum elbows, couplings and nipples (EC&N) for use with rigid aluminum conduit. All products are available for next-day delivery. Features include:

- Corrosion-resistant performance
- Light weight for easy and safe lifting
- No sparking

Visit picoma.com or call 800.PICOMA1 to find a local distributor.



AMERICAN
METAL



picoma[®]
A ZEKELMAN COMPANY

Rigid Aluminum Conduit


COUPLINGS

TRADE SIZE	OUTSIDE DIAMETER	LENGTH*	WEIGHT* LBS.		STANDARD CARTON QTY.
	in.	in.	Per 100	Per ctn.	
½	1.078	1½ ₁₆	6	6	100
¾	1.328	1¾	9	5	50
1	1.562	2	13	4	30
1¼	1.953	2¼ ₁₆	19	5	25
1½	2.219	2¼ ₁₆	23	6	25
2	2.750	2¾	35	7	20
2½	3.281	3¾	68	16	24
3	3.812	3¾	91	15	16
3½	4.438	3¾	108	13	12
4	5.000	3½	142	14	10
5	6.219	3¾	242	—	Bulk
6	7.312	4	320	—	Bulk

* Minimum dimension per manufacturing standard UL-6A.

ELBOWS 90°

TRADE SIZE	RADIUS**	OFFSET FIG. 1	STRAIGHT FIG. 1	WEIGHT* LBS.		STANDARD CARTON QTY.
				Per 100	Per ctn.	
½	4	6¾	1½	26	13	50
¾	4½	7¾ ₁₆	1½	40	20	50
1	5¾	9½	1¾	72	18	25
1¼	7¼	11¾	2	105	21	20
1½	8¼	12¾ ₁₆	2	153	23	15
2	9½	15½	2	210	Bulk	Bulk
2½	10½	19¼	3	500	Bulk	Bulk
3	13	21½	3¾	800	Bulk	Bulk
3½	15	24½	3¾	900	Bulk	Bulk
4	16	25½	3¾	1,200	Bulk	Bulk
5	24	37¾ ₁₆	3¾	2,400	Bulk	Bulk
6	30	49½	3¾	3,800	Bulk	Bulk



* Trade sizes 2½ and larger shipped in palletized cartons or bulk. Palletized and bulk elbows supplied with a thread protector on each end and UL label affixed.

** Minimum dimension per UL-6A.

NIPPLES*

TRADE SIZE	LENGTH* (IN.)	CLOSE		1½"		2"		2½"		3"		3½"		4"	
		STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)
½	1¾	25	2	25	3	25	4	25	5	25	7	25	8	25	9
¾	1¾	25	3	25	3	25	5	25	7	25	8	25	10	25	12
1	1½	25	4	—	—	25	7	25	8	25	12	25	14	25	16
1¼	1¾	25	7	—	—	25	10	25	13	25	16	25	20	25	23
1½	1¾	25	10	—	—	25	12	25	16	25	20	25	24	25	28
2	2	25	16	—	—	—	—	25	22	25	27	25	32	25	38
2½	2½	12	22	—	—	—	—	—	—	10	30	10	39	10	47
3	2¾	12	24	—	—	—	—	—	—	10	42	10	53	10	64
3½	2¾	12	42	—	—	—	—	—	—	—	—	—	—	10	75
4	2¾	12	51	—	—	—	—	—	—	—	—	—	—	10	87
5	3	Bulk	71	—	—	—	—	—	—	—	—	—	—	—	—
6	3¾	Bulk	105	—	—	—	—	—	—	—	—	—	—	—	—

TRADE SIZE	5"		6"		8"		10"		12"	
	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)
½	25	12	25	14	25	19	25	24	25	29
¾	25	15	25	18	25	25	25	31	25	38
1	25	21	25	26	25	36	25	45	25	55
1¼	25	29	25	36	12	49	12	62	12	75
1½	25	36	25	44	12	59	12	74	12	90
2	25	48	25	58	12	78	12	100	12	120
2½	12	64	12	80	5	114	5	148	5	180
3	10	86	10	108	5	152	5	196	5	240
3½	10	101	5	128	5	180	5	234	5	286
4	10	118	5	149	5	212	5	274	5	336
5	Bulk	155	Bulk	197	Bulk	281	Bulk	366	Bulk	450
6	Bulk	208	Bulk	263	Bulk	372	Bulk	481	Bulk	591

* Length reference is for close nipples only. All dimensions provided are for descriptive purposes only.



Tested and Listed for Safety
Our aluminum rigid elbows, couplings and nipples comply with the following standards: ANSI C80.5, federal specification WW-C-540c and UL-6A, to which they are Listed.

PIC-012324