
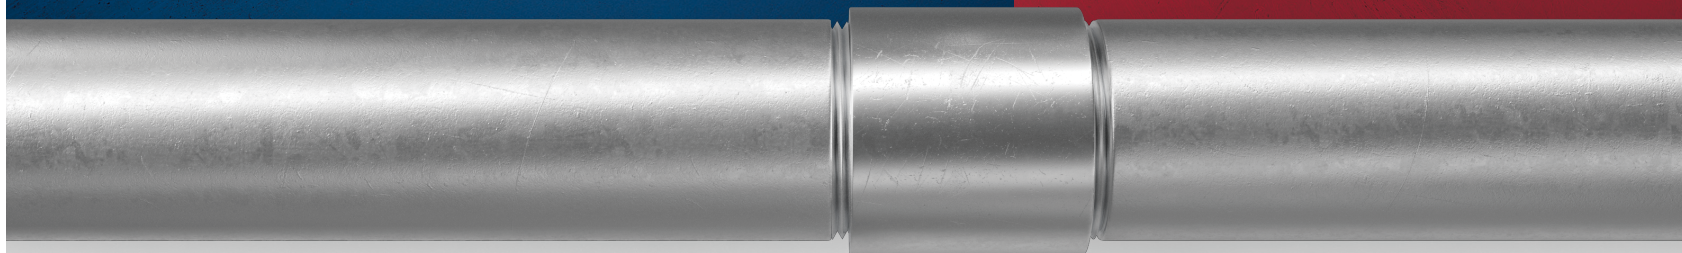
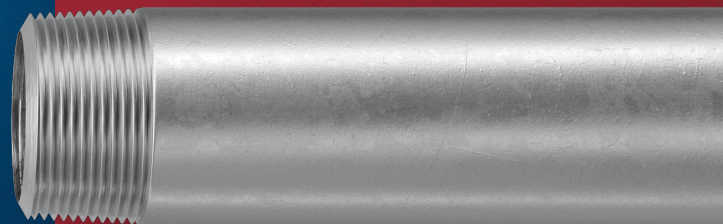


ALUMINUM EC&N MADE IN THE USA

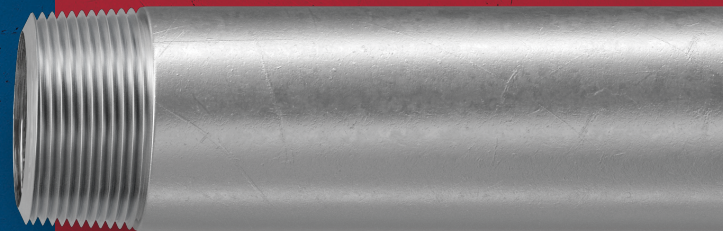

Look to Picoma for a full line of American-made aluminum elbows, couplings and nipples (EC&N) for use with rigid aluminum conduit. All products are available for next-day delivery. Features include:

- Corrosion-resistant performance
- Light weight for easy and safe lifting
- No sparking

Add your customized Call To Action here.
Add your customized Call To Action here.



AMERICAN
METAL



picoma[®]
A DIVISION OF ZEKELMAN INDUSTRIES

Rigid Aluminum Conduit


COUPLINGS

TRADE SIZE	OUTSIDE DIAMETER	LENGTH*	WEIGHT* LBS.		STANDARD CARTON QTY.
	in.	in.	Per 100	Per ctn.	
½	1.078	1⅞	6	6	100
¾	1.328	1⅞	9	5	50
1	1.562	2	13	4	30
1¼	1.953	2⅞	19	5	25
1½	2.219	2⅞	23	6	25
2	2.750	2⅞	35	7	20
2½	3.281	3⅞	68	16	24
3	3.812	3¼	91	15	16
3½	4.438	3⅞	108	13	12
4	5.000	3½	142	14	10
5	6.219	3¼	242	—	Bulk
6	7.312	4	320	—	Bulk

* Minimum dimension per manufacturing standard UL-6A.

ELBOWS 90°

TRADE SIZE	RADIUS**	OFFSET FIG. 1	STRAIGHT FIG. 1	WEIGHT* LBS.		STANDARD CARTON QTY.
	in.	in.		Per 100	Per ctn.	
½	4	6⅞	1½	26	13	50
¾	4½	7⅞	1½	40	20	50
1	5¾	9½	1⅞	72	18	25
1¼	7¼	11⅞	2	105	21	20
1½	8¼	12⅞	2	153	23	15
2	9½	15½	2	210	Bulk	Bulk
2½	10½	19¼	3	500	Bulk	Bulk
3	13	21½	3⅞	800	Bulk	Bulk
3½	15	24½	3¼	900	Bulk	Bulk
4	16	25½	3⅞	1,200	Bulk	Bulk
5	24	37⅞	3⅞	2,400	Bulk	Bulk
6	30	49½	3¾	3,800	Bulk	Bulk



* Trade sizes 2½ and larger shipped in palletized cartons or bulk. Palletized and bulk elbows supplied with a thread protector on each end and UL label affixed.

** Minimum dimension per UL-6A.

NIPPLES*

LENGTH		CLOSE		1½"		2"		2½"		3"		3½"		4"	
TRADE SIZE	LENGTH* (IN.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)
½	1⅞	25	2	25	3	25	4	25	5	25	7	25	8	25	9
¾	1⅞	25	3	25	3	25	5	25	7	25	8	25	10	25	12
1	1½	25	4	—	—	25	7	25	8	25	12	25	14	25	16
1¼	1⅞	25	7	—	—	25	10	25	13	25	16	25	20	25	23
1½	1¾	25	10	—	—	25	12	25	16	25	20	25	24	25	28
2	2	25	16	—	—	—	—	25	22	25	27	25	32	25	38
2½	2½	12	22	—	—	—	—	—	—	10	30	10	39	10	47
3	2⅞	12	24	—	—	—	—	—	—	10	42	10	53	10	64
3½	2¾	12	42	—	—	—	—	—	—	—	—	—	—	10	75
4	2⅞	12	51	—	—	—	—	—	—	—	—	—	—	10	87
5	3	Bulk	71	—	—	—	—	—	—	—	—	—	—	—	—
6	3⅞	Bulk	105	—	—	—	—	—	—	—	—	—	—	—	—

LENGTH	5"		6"		8"		10"		12"	
TRADE SIZE	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)	STD. CARTON QTY.	WEIGHT PER 100 (LBS.)
½	25	12	25	14	25	19	25	24	25	29
¾	25	15	25	18	25	25	25	31	25	38
1	25	21	25	26	25	36	25	45	25	55
1¼	25	29	25	36	12	49	12	62	12	75
1½	25	36	25	44	12	59	12	74	12	90
2	25	48	25	58	12	78	12	100	12	120
2½	12	64	12	80	5	114	5	148	5	180
3	10	86	10	108	5	152	5	196	5	240
3½	10	101	5	128	5	180	5	234	5	286
4	10	118	5	149	5	212	5	274	5	336
5	Bulk	155	Bulk	197	Bulk	281	Bulk	366	Bulk	450
6	Bulk	208	Bulk	263	Bulk	372	Bulk	481	Bulk	591

* Length reference is for close nipples only. All dimensions provided are for descriptive purposes only.



Tested and Listed for Safety

Our aluminum rigid elbows, couplings and nipples comply with the following standards: ANSI C80.5, federal specification WW-C-540c and UL-6A, to which they are Listed.

